

GoLift

The world's
smallest
patient lift



GoLift is an ideal ceiling lift system designed for routine transfers of patients





It is aesthetically pleasing and is the most compact ceiling lift in its class

State-of-the-art lifting

GoLift boasts state-of-the-art battery technology coupled with all metal gears that allows the caregiver to safely, and effortlessly, transfer a patient weighing up to 318 kg on a single lift. For larger patients, combine two compact GoLift 700 systems to obtain a lifting capacity of 500 kg.

Ready to lift in any installation

Our modular track system gives you flexibility to suit the needs of any working environment. Depending on how the hoist is to be used, we are able to design and fit straight, curved and XY (full room coverage) track configurations.



Its functional design is suited to everyday use



Functional design

The smooth edges and rounded corners of GoLift and its accessories are not only aesthetically pleasing but help address infection control requirements.

Light but safe

GoLift only weighs 4.6kg which makes it both safe and easy to use. Its functional design gives quick access for battery changes and makes servicing and maintenance simple.




GoLift has many class leading features



GoLift on our regular track is ideal for rooms with low ceilings

There are three GoLift track profiles

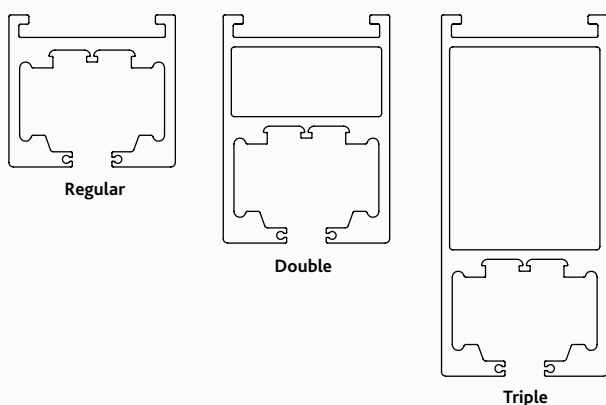

Track configurations

Straight Track

Curved Systems

Full Room Coverage (X/Y or H Systems)

Optional Infection Control Track

Optional recessed, flush mount track systems

All GoTrack Systems feature


Low weight and high capacity

Fast and flexible installation

Hidden End Stops for safety

Anywhere/Continuous charge

Description	Part Number	Length x Width x Height	Hoist Weight	Material
Regular	TRK-REG-96	2440 x 67 x 60 mm	3.77 kg	White powder coated extruded aluminium
Regular	TRK-REG-120	3050 x 67 x 60 mm	3.77 kg	White powder coated extruded aluminium
Regular	TRK-REG-240	6100 x 67 x 60 mm	3.77 kg	White powder coated extruded aluminium
Double	TRK-DBL-120	3050 x 67 x 90 mm	4.72 kg	White powder coated extruded aluminium
Double	TRK-DBL-150	3800 x 67 x 90 mm	4.72 kg	White powder coated extruded aluminium
Double	TRK-DBL-240	6100 x 67 x 90 mm	4.72 kg	White powder coated extruded aluminium
Triple	TRK-TRP-120	3050 x 67 x 146 mm	5.65 kg	White powder coated extruded aluminium
Triple	TRK-TRP-240	6100 x 67 x 146 mm	5.65 kg	White powder coated extruded aluminium
Custom	Custom lengths in any track type available upon request			

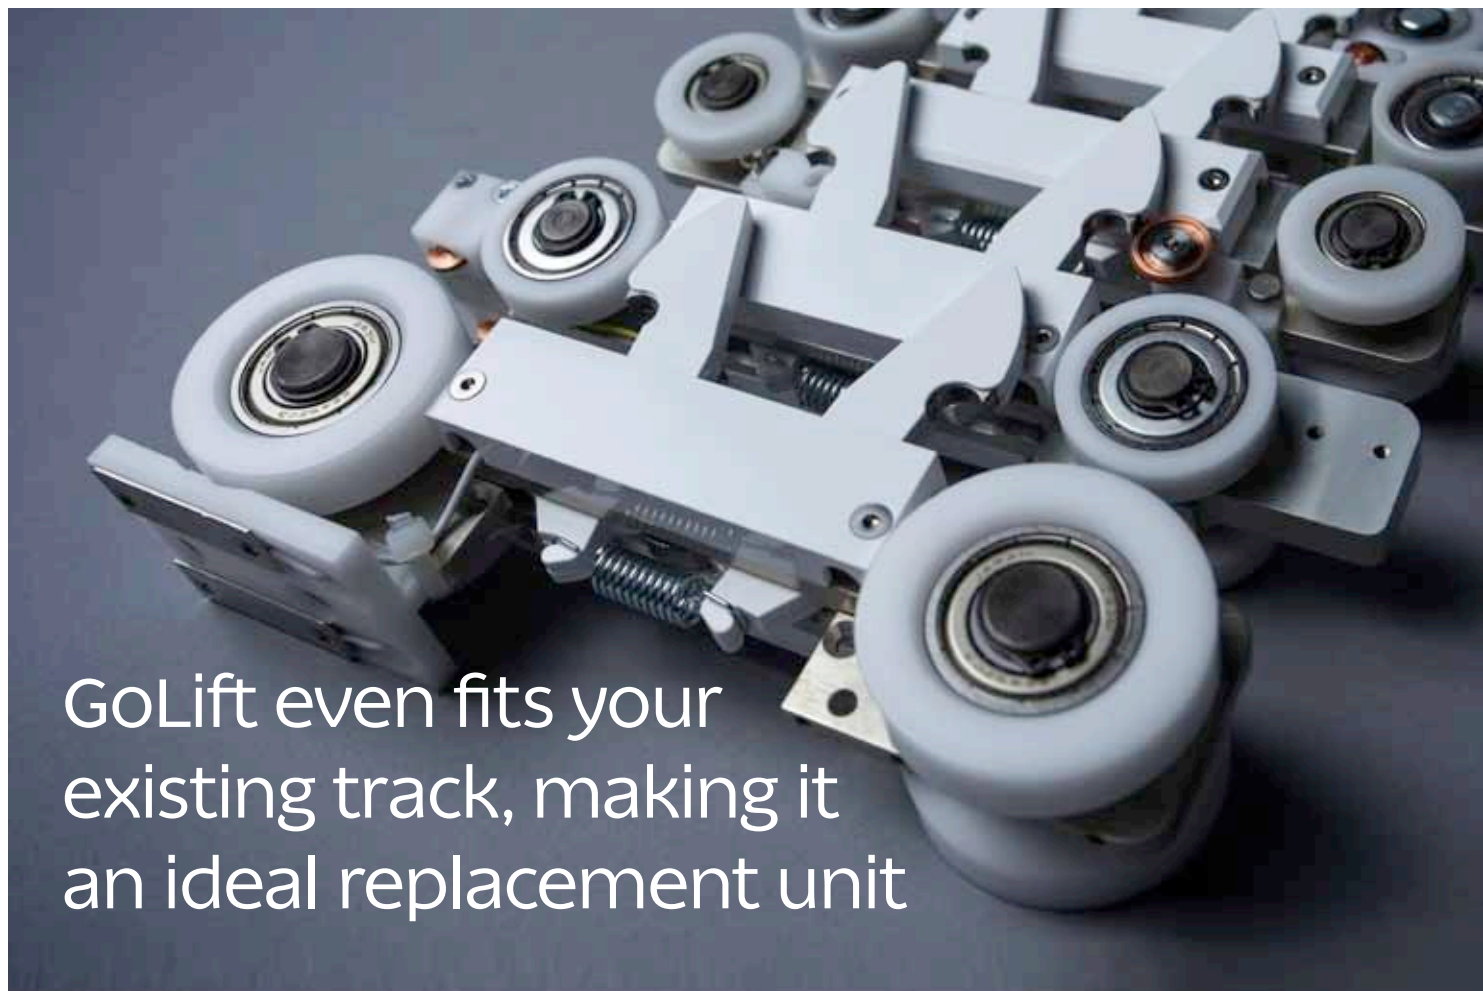


GoLift even fits your existing track, making it an ideal replacement unit


The unique quick connect design of our trolley adapters allow for easy installation and service, which will save you time and money!

If you need to replace your aging lifts, our patent pending GoLift can adapt to any existing track in your facility with our "Plug & Play" design.


GoLift accessories

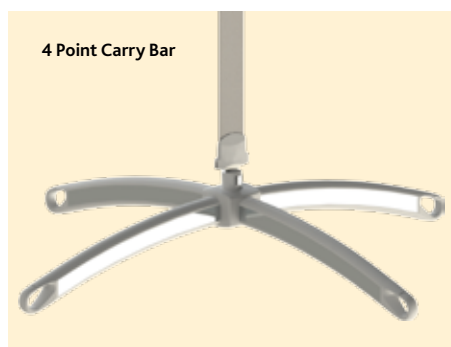


4 Point Carry Bar

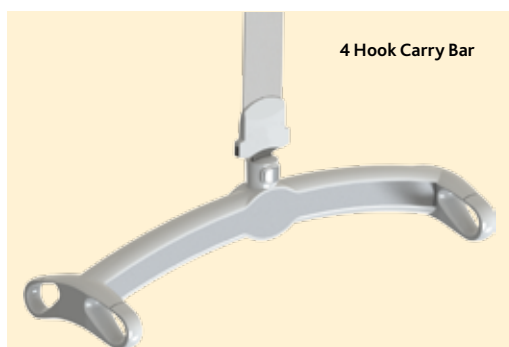

4 Hook Carry Bar

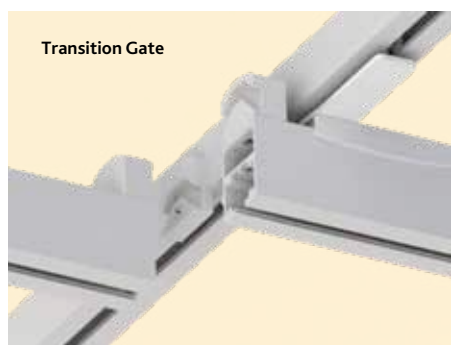

Transition Gate

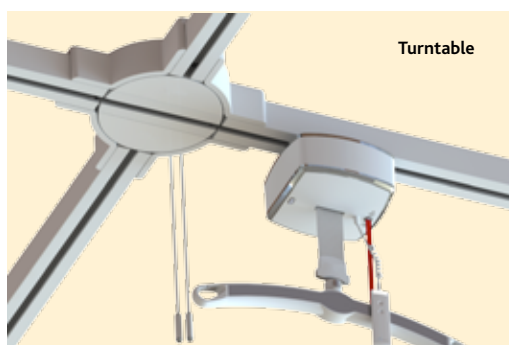

Turntable

GoLift has trolley designs compatible with the following brands of track:

ARJO
GULDMANN
LIKO
PRISM
JOERNS

Specifications and Listings

Three GoLift Weight Capacities

GO-LIFT-400	Single Lift	Lift Up to 28st / 181 kg
GO-LIFT-700	Single Lift	Lift Up to 50st / 318 kg
GO-LIFT-1000	Tandem Lifts	Lift Up to 72st / 454 kg

Safe Working Load (SWL)

28st / 181 kg

50st / 318 kg

72st / 454 kg

Dimensions

28 & 50st / 181 & 318 kg:

Length: 197 mm

Width: 197 mm

Height: 108 mm

Strap Length: 2134 mm

72st / 454 kg:

Length: 394 mm

Width: 197 mm

Height: 108 mm

Strap Length: 2134 mm

Unit Weight

28st / 181 kg version: 4 kg

50st / 318 kg version: 5 kg

72st / 454 kg version: 9 kg
(Tandem Lifts)

Lift Case

Flame retardant ABS

Safety

Emergency Stop

Emergency Lowering Device

Upper Limit Detection

Lower Limit Detection

Slack Tape Sensor

Free Fall Brake
(over speed governor)

Low Battery and
Dead Battery Alarms

Soft Start and Stop

Overload Protection

Emergency Manual Lowering

Approvals

Certified to:
Can/CSA-C22.2 No 60601-1:08,
UL 60601-1:08

Tested to: ISO 10535-06, CE

Hand Control

Capacitive Touch

Protection Class: IPX0

Service Life

10 years or 22,500 cycles

Maximum Sound Level

<55 dB

Maximum Lifting Speed

No load: 50mm/second

11st / 68 kg: 33mm/second

28st / 181 kg: 25mm/second

50st / 318 kg: 25mm/second

72st / 454 kg: 25mm/second

Batteries

High Capacity, Nickel Metal
Hydride (Ni-Mh)

Standard: 2 x 14.4V (2Ah)

Optional: 2 x 14.4V (3.3Ah) or (5Ah)

Battery Charger

100-240 VAC 40 Watt

Number of Lifts per Charge (Duty: 10/90)

25% of strap at midrange
(calculated using 5Ah Packs)

375 with 13st / 84 kg

170 with 28st / 181 kg

102 with 50st / 318 kg

Charging time

2 – 4 hours



0845 658 8411

sales@wealdenrehab.com

www.wealdenrehab.com



113 Hopewell Drive, Chatham, Kent ME5 7NP | Wealden Rehab is a trading name of Wealden Rehab Ltd

